

TufTile®

ADA DETECTABLE WARNING PRODUCTS

TACTILE DIRECTIONAL INDICATORS




[TufTile.com](https://www.TufTile.com)

☎ 1-888-960-8897

📍 905 Telser Road, Lake Zurich, IL 60047

TACTILE DIRECTIONAL INDICATORS

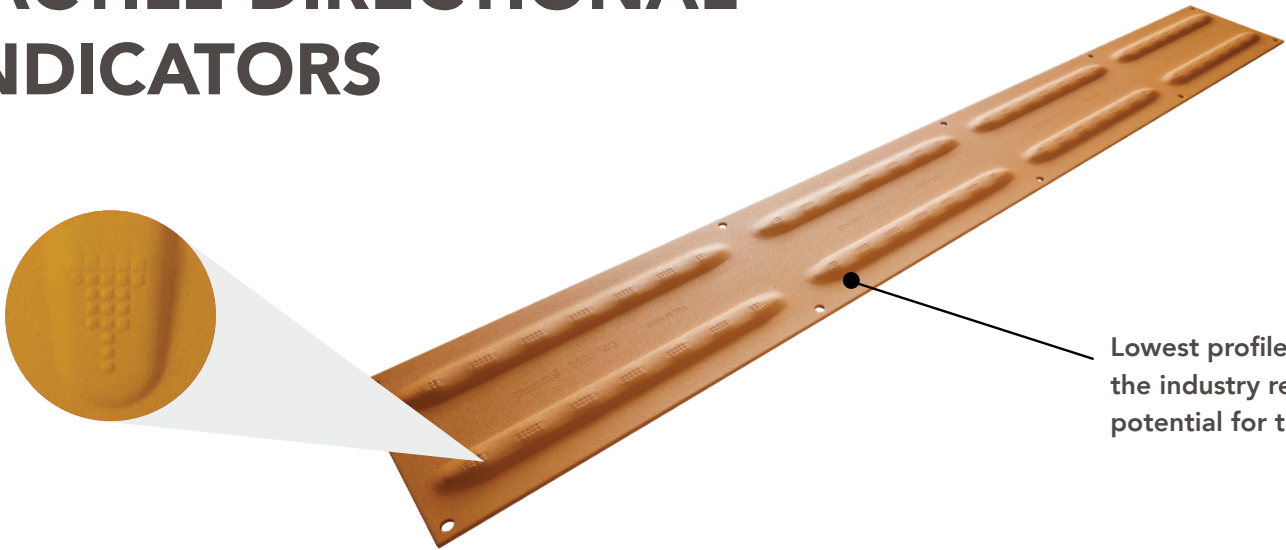

Lowest profile edge in the industry reduces potential for tripping.

Creating Safe Passage on Shared-Use Paths

TACTILE DIRECTIONAL INDICATORS

For shared-use paths and to separate pedestrians from bicycles and vehicles where no curb or barrier exists.

PROTECTING PERSONS WITH LOW VISION

Ideal for high-caution areas including shared-use paths, transit board platforms, stairs, escalators, elevators, and more.

BEST-IN-CLASS DESIGN

Designed to ISO 23599 standards, the multi-bar system is easily modified, saving time and money. Reduce trip hazards with the lowest profile edge available.

PRODUCT ASSORTMENT

Available in 10 gauge and 16 gauge galvanized steel for wet-set or surface-applied installation. Two modular sizes 6" x 12" and 6" x 48".

SUPERIOR COLOR & PROTECTION

In-house powder coating system provides superior UV protection and slip and abrasion resistance.

G90 GALVANIZED STEEL

G90 Galvanized steel tactile directional indicators are significantly more durable than composite and will not bloom, crack, chip, or fade.

10-YEAR WARRANTY

For full warranty information visit www.tuftile.com. Meets Buy America Act 23 C.F.R. § 635.410.






MULTI-BAR SYSTEM

The layout of the tactile directional indicator is critical to the person depending on them for safe maneuvering of the area. A single row of directional indicators in the center of the path indicates inbound and outbound pedestrian and non-motorized traffic. Multiple rows along the edge establish a boundary.

Field modifications during installation are common, and with TufTile's multi-bar system, they are also quick and easy. To create multiple rows, simply place two or more indicators side-by-side until the desired width is achieved.

FEATURES

- Quickly complete field installations with side-by-side multi-bar design
- G90 powder-coated galvanized steel
- Lowest profile edge in the industry
- Save money with only two SKUs
- Replaceable

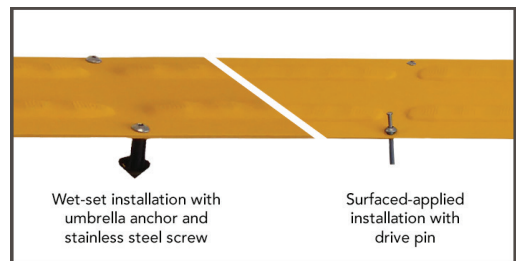



TUFTILE IN-HOUSE POWDER COATING ADVANTAGE

TufTile's in-house powder coating system, with multi-stage wash and zirconium rinse, ensures superior bonding and adhesion of the powder-coated finish.

- UV stable finish will not bloom, crack, chip, or fade
- Wet & dry slip-resistant surface
- Available in nine colors and natural
- Custom colors available with minimum order quantity

Colors Available



PRODUCT SPECIFICATIONS

ISO 23599 Compliant

Galvanized Steel Test Data		
Galvanization	G90 Guardrail Grade	G90
ASTM C 501	Abrasion Resistance	0.005
FDOT FM 3 - C 1028	Slip Resistance	Dry - 0.90, Wet - 0.81
ASTMA A 370	Tensile Strength	49,770 psi
ASTM D 695	Compressive Properties	55,170 psi
ASTM D 5420	Impact Resistance	No Cracking, No Delamination
ASTM E 84-18 ANSI/UL723	Test for Surface Burning Characteristics	CFS - 0.00, FSI - 0, CSD - 5.8, SDI - 5




Email All Orders To: sales@tuftile.com
 Contact Customer Service: 1-888-960-8897
 View the entire TufTile product portfolio at tuftile.com



DIRECTIONAL GUIDENCE SURFACE -APPLIED INSTALLATION INSTRUCTIONS


1. Read installation instructions thoroughly before you begin.
2. Surface must be clean and free of debris before beginning. A wire brush or cup grinder may be needed to address any imperfections.
3. Place Directional Guidance Tile on surface where it is to be installed and mark one side (Fig. 1)
Note: A chalk line is recommended to maintain a straight installation.

Fig. 1




4. Remove and apply sealant to the back side of the tile between bars as required (Fig.2)
Note: Use sealant according to manufacturers instructions.

Fig. 2




5. Place tile in marked location and drill 2 - 1/4" x 2" minimum deep holes and insert drive pin fasteners (Fig 3)
Note: Do not drive pins yet as these are to keep tile in place while drilling remaining holes.

Fig. 3

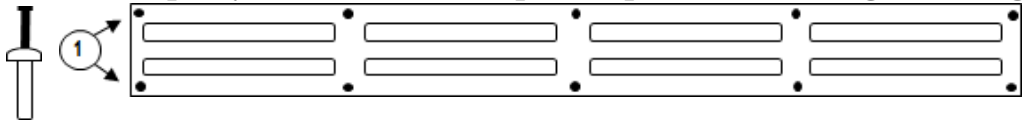


6. Continue drilling holes in all anchor locations moving across the tile. (Fig 4) **Once holes are drilled, clean the tile with a broom or blower before inserting remaining drive pins.**

Fig. 4

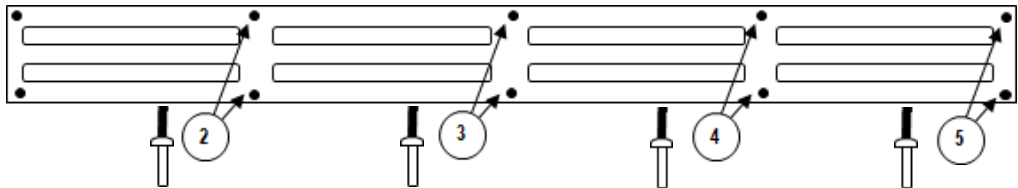


7. Insert drive pins and hammer them in moving down the tile in one direction
Note: Hammer pin so that it is even with the head of the anchor. (Fig 5)

Fig. 5



Important: If cutting is required, new holes need to be drilled and anchors inserted.

Installation is now complete



[Click here](#) for more information including an installation video tutorial.

Contact us at 888-960-8897 with questions.




DIRECTIONAL GUIDANCE WET-SET (REPLACEABLE) INSTALLATION INSTRUCTIONS

1. Read installation instructions thoroughly before you begin.
2. Make sure that concrete is compliant with ADA guidelines and engineers specifications to ensure that proper tile installation can be achieved.

3. Place Directional Guidance Tile into concrete until the top surface is flush (Fig. 1)

Note: A string line is recommended to maintain a straight installation.

Fig. 1



4. Using a rubber mallet, tap the entire surface of the tile to ensure proper consolidation of concrete around the anchors. (Fig. 2)


Note: Installing tiles after the moisture is gone from the top surface will help keep tiles from floating.

FIG. 2



5. Finish concrete to required specifications. *Do not stand or walk on tile until concrete is fully cured.*
6. Once all post installation finishing has been completed, clean any excess concrete slurry that may have consolidated on the top surface.

Important: If cutting is required, new holes need to be drilled and anchors re-installed.



Installation is now complete

[Click here](#) for more information including an installation video tutorial.

Contact us at 888-960-8897 with questions.








6" X 12" X 16 GA (REPLACEABLE)

GALVANIZED STEEL TACTILE DIRECTION INDICATOR R



DRW NO DT61216GV-XX-YYY		REVISED 9-12-24	
TOLERANCE +/- 0.050	SCALE	REV 1	DATE 10-20-20

NOTES:
 "XX" WS DESIGNATES WET SET
 "XX" SA DESIGNATES SURFACE APPLIED
 "YYY" DESIGNATES COLOR

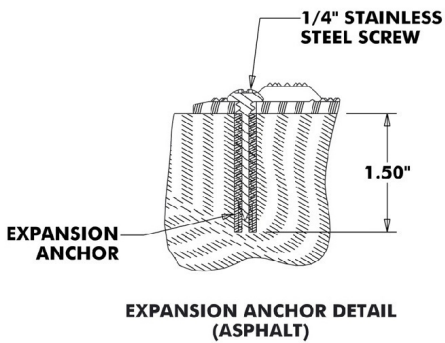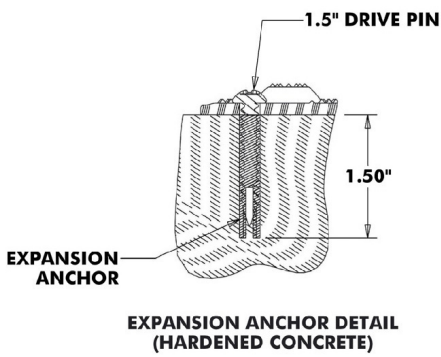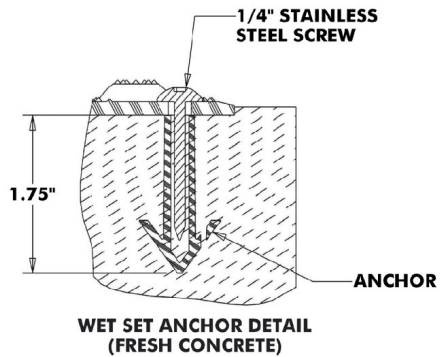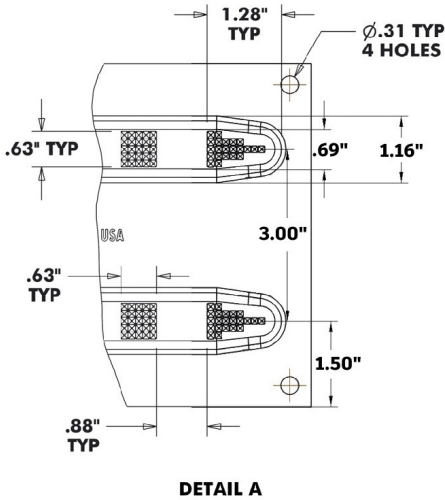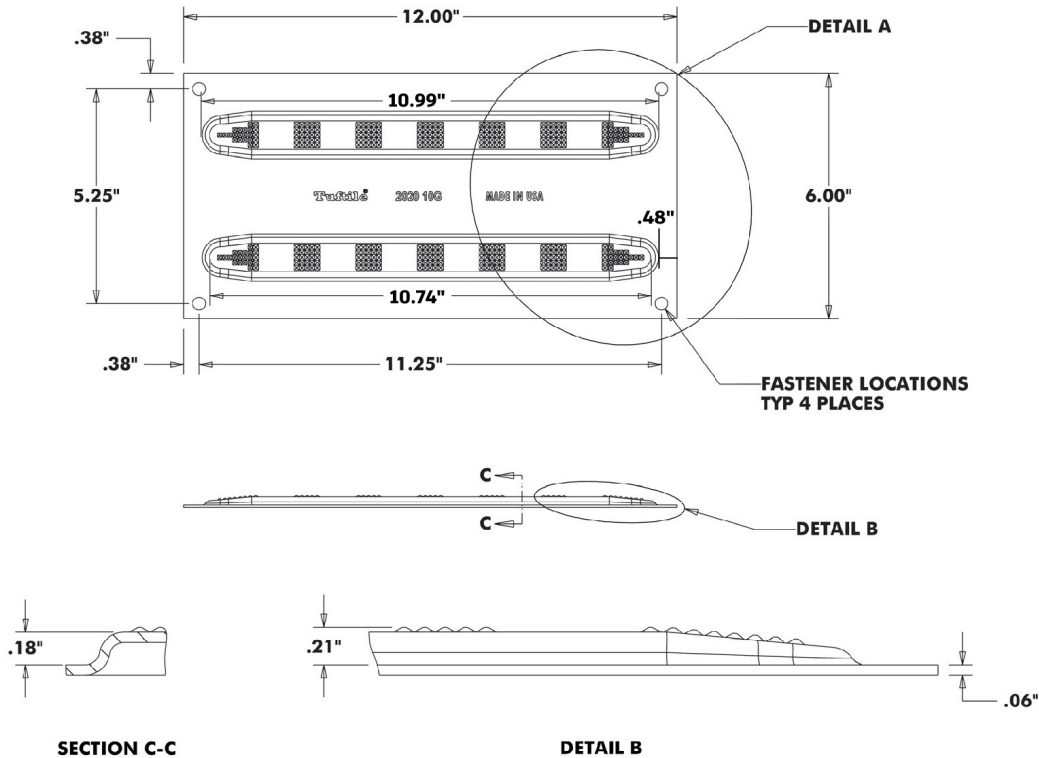

TufTile.com

1-888-960-8897 905 Telser Road, Lake Zurich, IL 60047

©2021 TufTile, Inc. All Rights Reserved. V2.0

TufTile®

Technical drawing of a composite beam showing top, side, and cross-sectional views with dimensions and callouts.

Top View Dimensions:

- Overall length: 48.00"
- Overall width: 6.00"
- Left edge thickness: .38"
- Right edge thickness: .96"
- Top edge thickness: 5.25"
- Distance from left edge to first fastener: 10.99"
- Distance between fasteners: 10.74"
- Distance from last fastener to right edge: 11.78"
- Distance from left edge to center of first fastener: 23.63"
- Distance from left edge to center of last fastener: 35.63"
- Distance from left edge to right edge: 47.25"

Callouts:

- DETAIL A:** Points to the right edge of the beam.
- FASTENER LOCATIONS TYP 10 PLACES:** Points to the fasteners along the top edge.
- DETAIL B:** Points to the bottom edge of the beam.


Side View Dimensions:

- Top edge thickness: .63" TYP
- Bottom edge thickness: .63" TYP
- Left edge thickness: .18"
- Right edge thickness: .06"

Cross-Sectional Views:

- SECTION C-C:** Shows the cross-section of the beam with a top flange and a bottom flange.
- DETAIL B:** Shows the cross-section of the beam with a top flange and a bottom flange.

"YYY" DESIGNATES COLOR

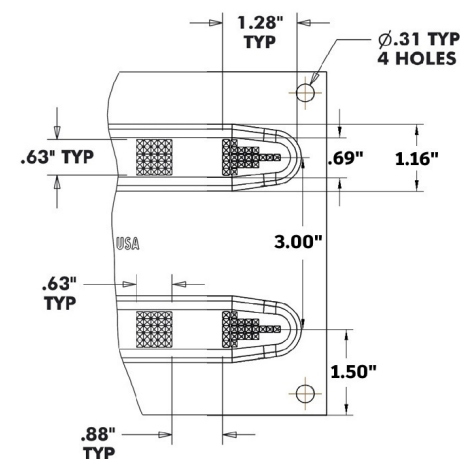



A cross-sectional diagram of a wet set anchor in fresh concrete. A vertical 1/4" stainless steel screw is shown passing through a top surface into the concrete. The screw has a threaded section and a smooth section. A dimension line on the left indicates a depth of 1.75" for the smooth section. At the bottom of the smooth section, there is a hook-like bend in the screw, labeled as the 'ANCHOR'. The concrete is represented by a hatched pattern.

1/4" STAINLESS STEEL SCREW

1.75"

ANCHOR

**WET SET ANCHOR DETAIL
(FRESH CONCRETE)**

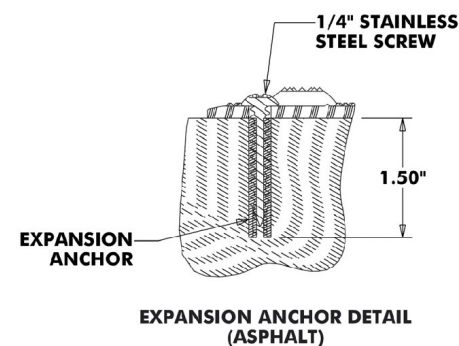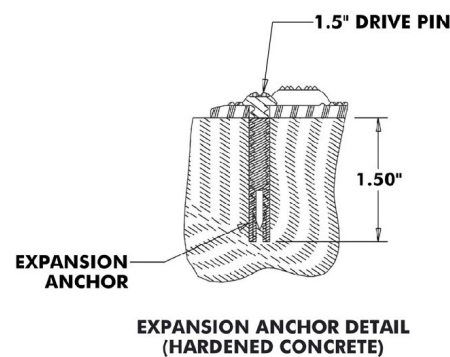








12" X 24" X 16 GA (REPLACEABLE)

GALVANIZED STEEL TACTILE DIRECTION INDICATOR



DRW NO DIR122416GV-XX-YYY		REVISED	
TOLERANCE +/- 0.050	SCALE	REV 1	DATE 12/4/2024

NOTES:
 "XX" WS DESIGNATES WET SET
 "XX" SA DESIGNATES SURFACE APPLIED
 "YYY" DESIGNATES COLOR

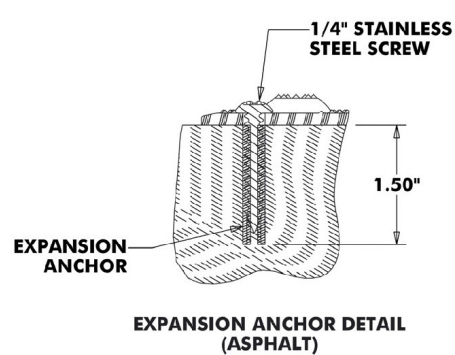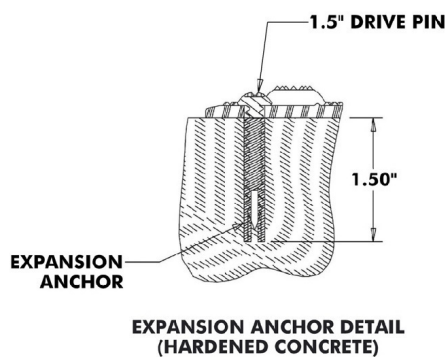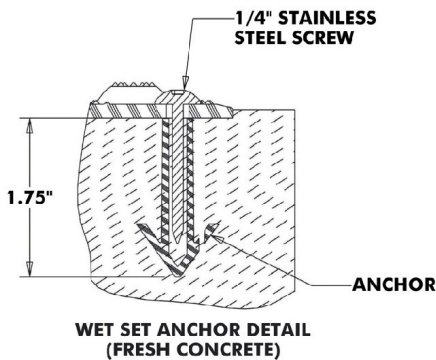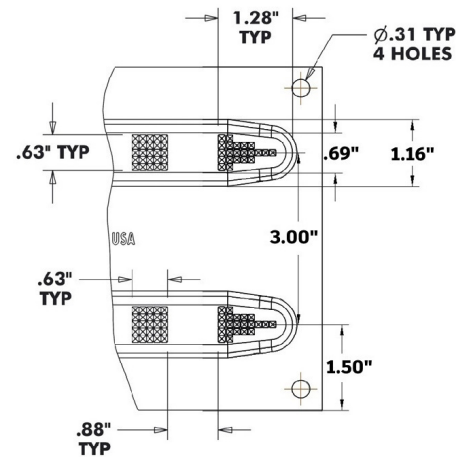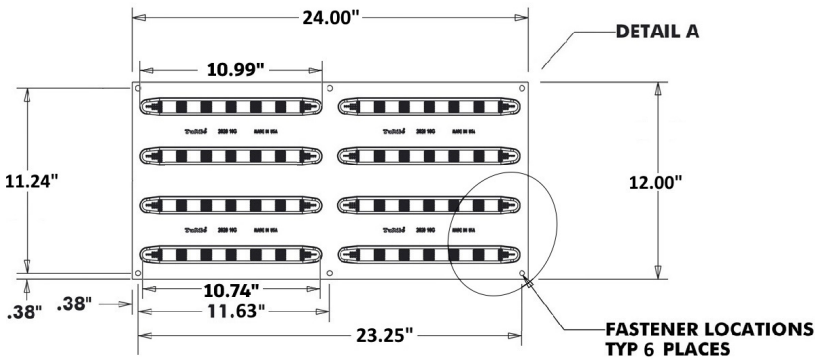

TufTile.com

1-888-960-8897 905 Telser Road, Lake Zurich, IL 60047

©2021 TufTile, Inc. All Rights Reserved. V2.0






12" X 60" X 16 GA (REPLACEABLE)

GALVANIZED STEEL TACTILE DIRECTION INDICATOR



DRW NO DIR126016GV-XX-YYY		REVISED	
TOLERANCE +/- 0.050	SCALE	REV 1	DATE 12/4/2024

NOTES:
 "XX" WS DESIGNATES WET SET
 "XX" SA DESIGNATES SURFACE APPLIED
 "YYY" DESIGNATES COLOR

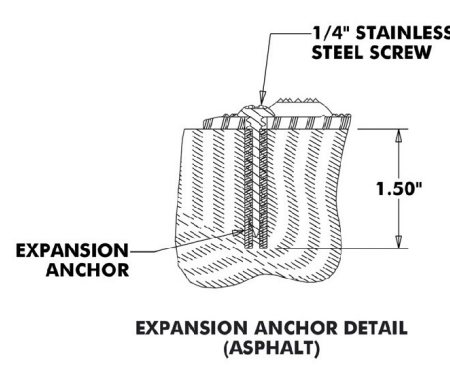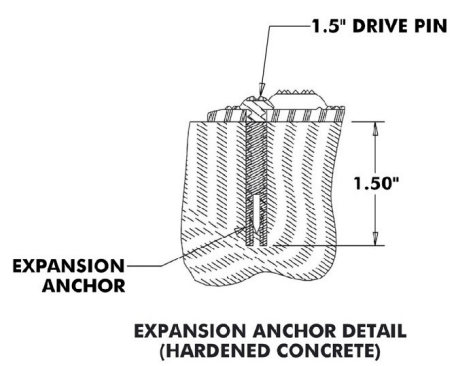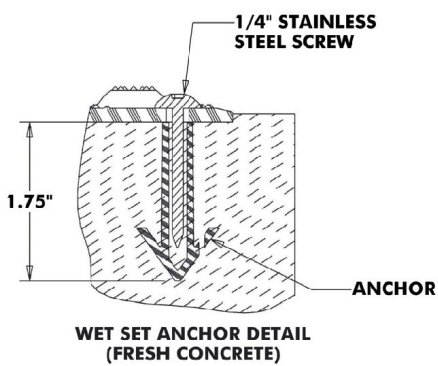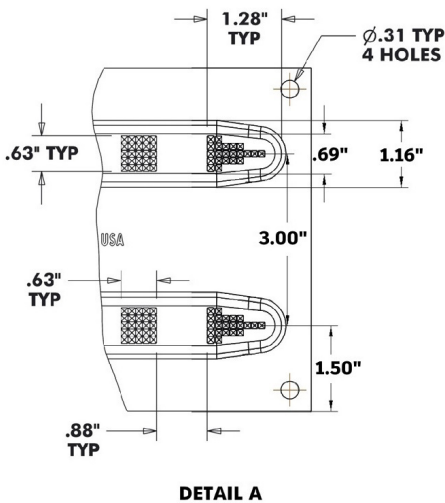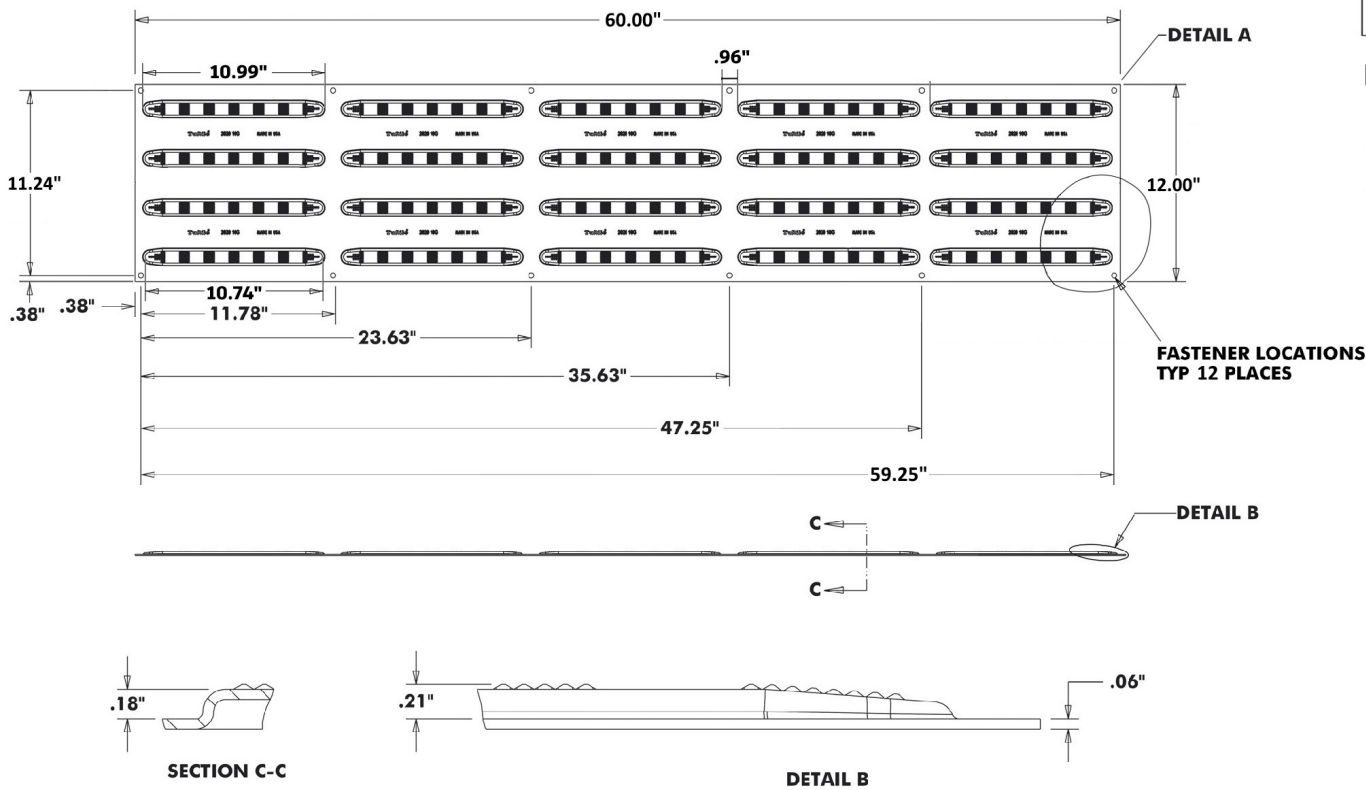

TufTile.com

1-888-960-8897 905 Telser Road, Lake Zurich, IL 60047

©2021 TufTile, Inc. All Rights Reserved. V2.0






24" X 24" X 16 GA (REPLACEABLE)

TACTILE DIRECTION INDICATOR



DRW NO DIR242416GV-XX-YYY		REVISED	
TOLERANCE +/- 0.050	SCALE	REV 1	DATE 12/4/2024

NOTES:
 "XX" WS DESIGNATES WET SET
 "XX" SA DESIGNATES SURFACE APPLIED
 "YYY" DESIGNATES COLOR

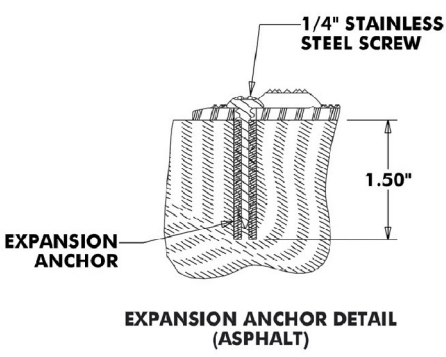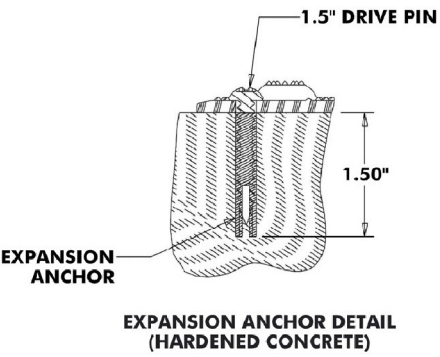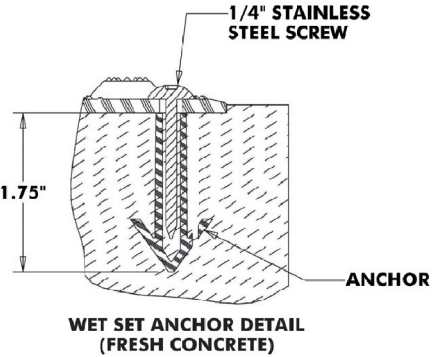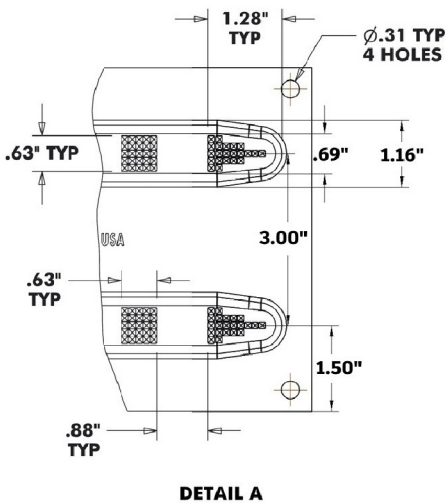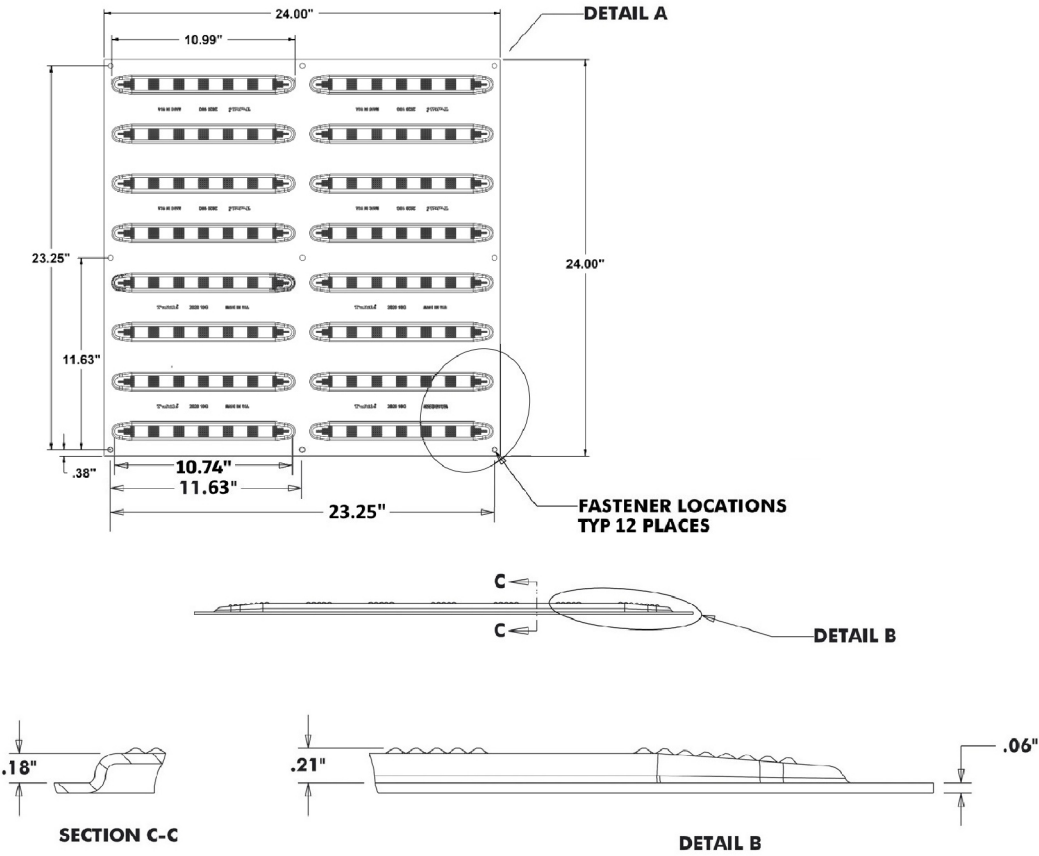

TufTile.com

1-888-960-8897 905 Telser Road, Lake Zurich, IL 60047

©2021 TufTile, Inc. All Rights Reserved. V2.0

BUY AMERICA ACT CERTIFICATION

By law, America manufactured products must be used in all Federal Transportation projects and all state and local government projects that use Federal Transportation funds.

The Buy America provision of the law explicitly requires steel, cast iron, and polymer-based products manufactured in United States mills, foundries, and other production facilities are used in Federal Transportation infrastructure projects. Under the various "Buy America" definitions, the following are those that we comply with:

- American Recovery and Reinvestment Act of 2009, Section 1605 – Buy America Act
- Infrastructure Investment and Jobs Act (IIJA; P.L. 117-58) November 2021
- Federal Highway Administration, 23 U.S.C. § 313 – Buy America; 23 C.F.R. § 635.410
- Federal Transit Administration, 49 U.S.C. § 5323(j)(1); 49 C.F.R. Part 661
- Federal Aviation Administration, 49 U.S.C. §50101

TufTile galvanized steel, cast iron, and polymer detectable warning tiles and radius-wedges are manufactured in the United States from United States made materials in accordance with Buy America, 23 C.F.R § 635.410 requirements.

A handwritten signature in cursive script that reads "Ted Meyers".

Ted Meyers
President



GALVANIZED STEEL 10-YEAR LIMITED WARRANTY

TufTile, Inc. values your business, and the TufTile, Inc. tactile galvanized steel tile (the “product”) you purchased comes with a limited warranty that the product will be free from defects for a period of ten years from date of installation subject to ordinary wear and tear. Failure to comply with recommended applications and installation of the product voids this warranty. Customer misuse including negligence, physical abuse and defects resulting from improper installation or resulting from outside forces (including, but not limited to, snow plows causing damage) are not covered by this warranty. Modifying galvanized tiles by way of cutting the tile may expose the cut edge area to rust. Modified tiles however, will remain structurally sound and cutting tiles will not impact the lifespan of the tile. Also, the rust at the exposed edge of the tile will not migrate under the powder coat finish. Local building codes may require minimum tactile tile performance specifications, and TufTile, Inc. does not warrant product installations that violate building codes. While within the limited warranty period, if the product is not in good working order for its intended purposes, a replacement product shall be made available to the purchaser of the product. Purchaser’s remedy is limited to replacement of the product and no consequential or incidental damages and costs (including, but not limited to, lost profits, labor or transportation costs in connection with the removal, replacement and installation of the product) are recoverable or within the coverage of this limited warranty. Any representations made in connection with the sale of this product that differ from the terms of this limited warranty are not covered and should be brought to the attention of TufTile, Inc. immediately. No claim for replacement of a defective product will be honored without TufTile, Inc.’s reservation of its right to inspect the product for the claimed defect and its determination that the replacement of the product is covered by this warranty. The term of this limited warranty shall commence on the date of installation. Proof of purchase shall be required to be eligible for this warranty and to establish the commencement date of this limited warranty. No warranty replacement of the product is provided unless the purchaser’s written replacement claim is submitted to TufTile, Inc. before the expiration of ten years from the date of installation of the product.

TO THE MAXIMUM EXTENT APPLICABLE AND ALLOWABLE UNDER LAW, THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE FACE OF THE TUFTILE INC. LIMITED WARRANTY, AND TUFTILE INC. DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, REGARDING THE PRODUCT, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT. TO THE MAXIMUM EXTENT ALLOWABLE BY FEDERAL AND STATE LAW, THIS WARRANTY SUPPLEMENTS OR SUPERSEDES FEDERAL AND STATE CONSUMER GOODS WARRANTY PRO

